



'12-'16 Pro-Climb
'15-'16 Viper M-TX; X-TX
Mounting Instructions

Please note that GLSV assumes no responsibility for damage that may occur during installation. Snowmobiling presents inherent dangers. GLSV assumes no responsibility for damage, injuries, or casualties that result from the use of this product. By installing the product the purchaser agrees to release GLSV from any and all liabilities. GLSV will provide a full refund if purchaser does not agree to the above terms.




47140 N. Main Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

Stock



Replace Stock Rear
Scissor Link

Stock

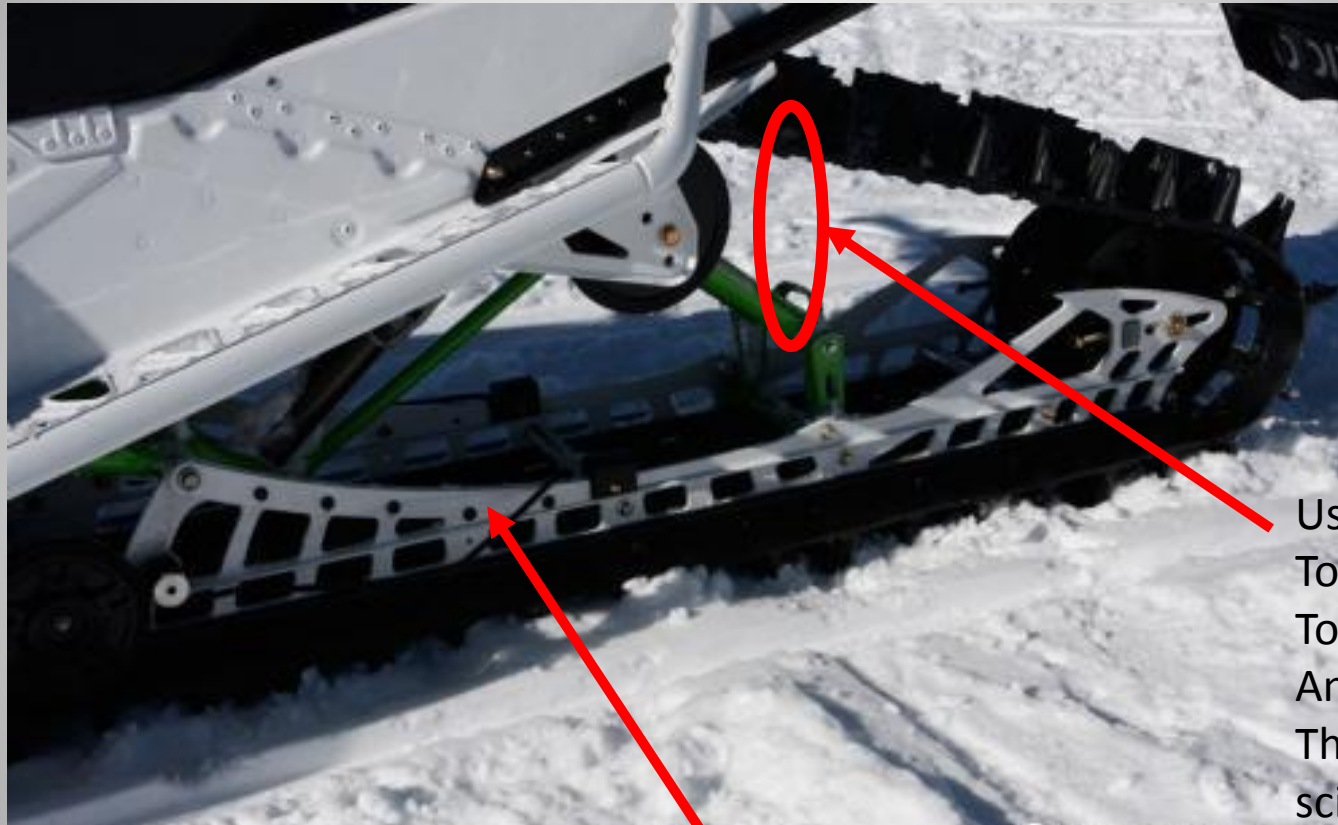


Use Ratchet Strap
To Hold the Rear
Torque Arm Up
And then remove
The stock rear
scissor

Unload Torsion Spring
If equipped


Drill New Hole

Remove the stock limiter

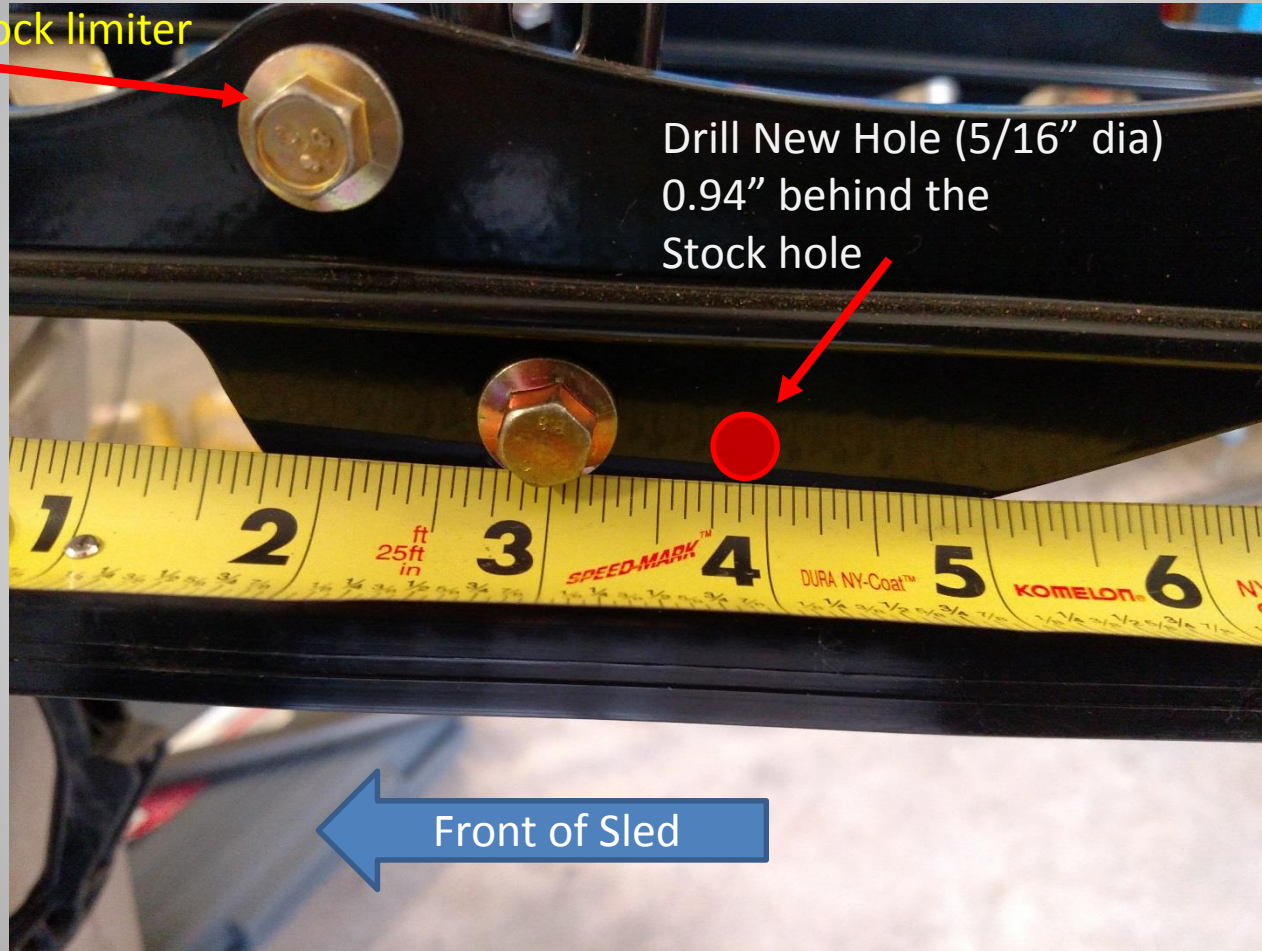

There are no longer nuts
On the top of the mount.
They are just bolts that
Get inserted from the top

Install HELO

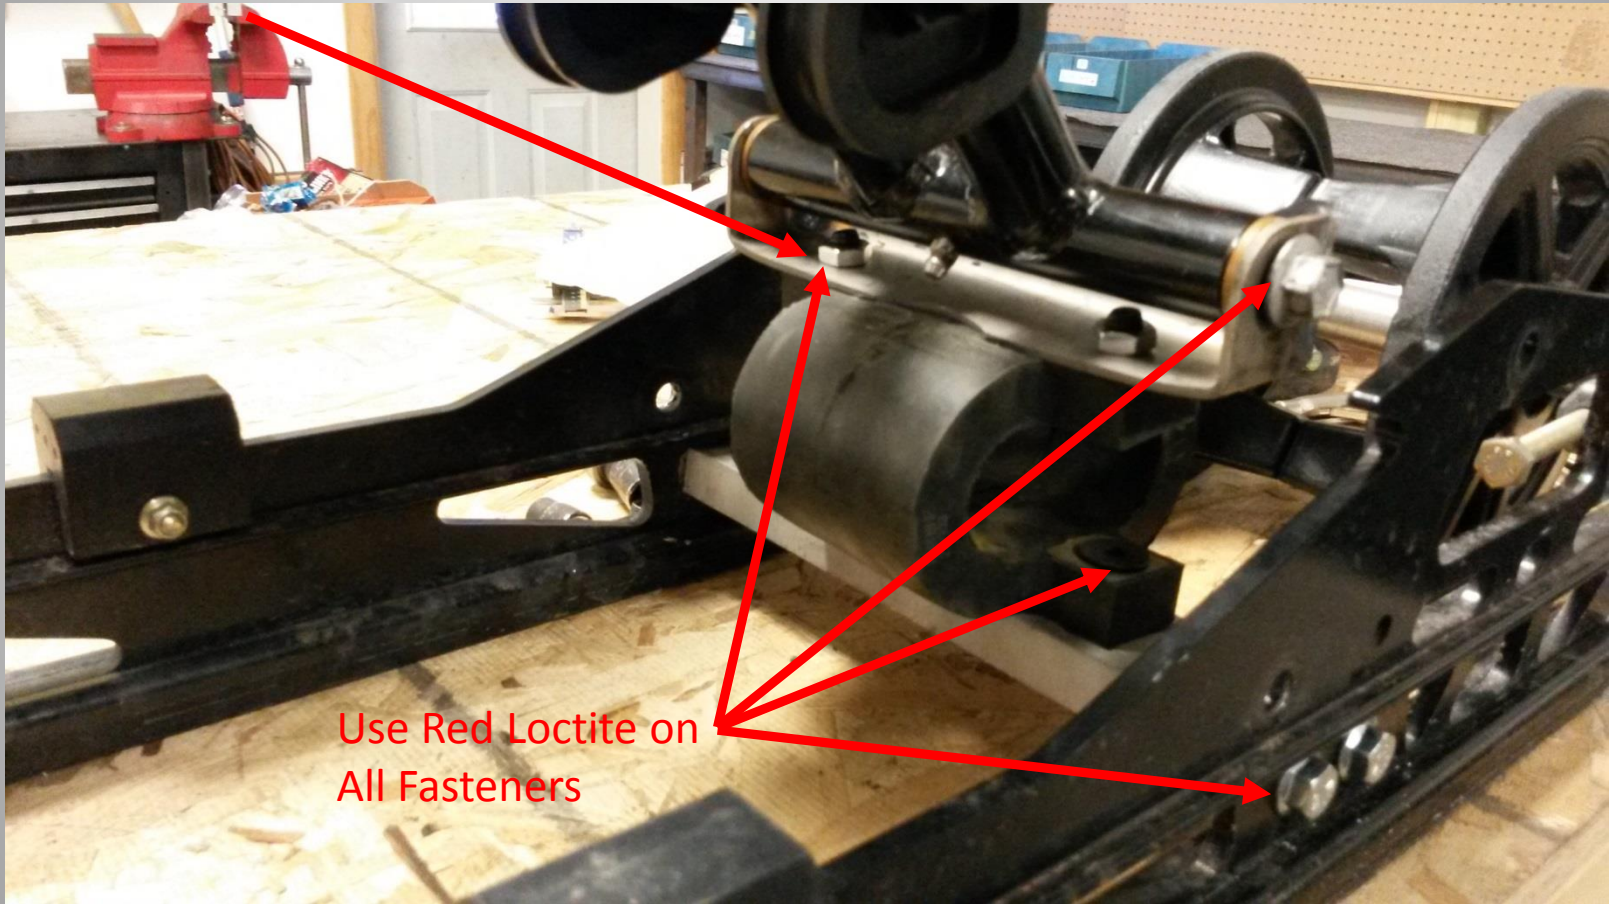

EZ·RYDE™

47140 N. Main Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

Install HELO

