



'09-'11 Crossfire

'09-'11 F-Series

## Mounting Instructions

*Please note that GLSV assumes no responsibility for damage that may occur during installation.*

*Snowmobiling presents inherent dangers. GLSV assumes no responsibility for damage, injuries, or casualties that result from the use of this product. By installing the product the purchaser agrees to release GLSV from any and all liabilities. GLSV will provide a full refund if purchaser does not agree to the above terms.*




47140 N. Main Street  
Houghton MI 49931  
906.482.7530  
[www.EZRyde.com](http://www.EZRyde.com)

# Stock



Replace Stock Rear  
Scissor Link

# Stock

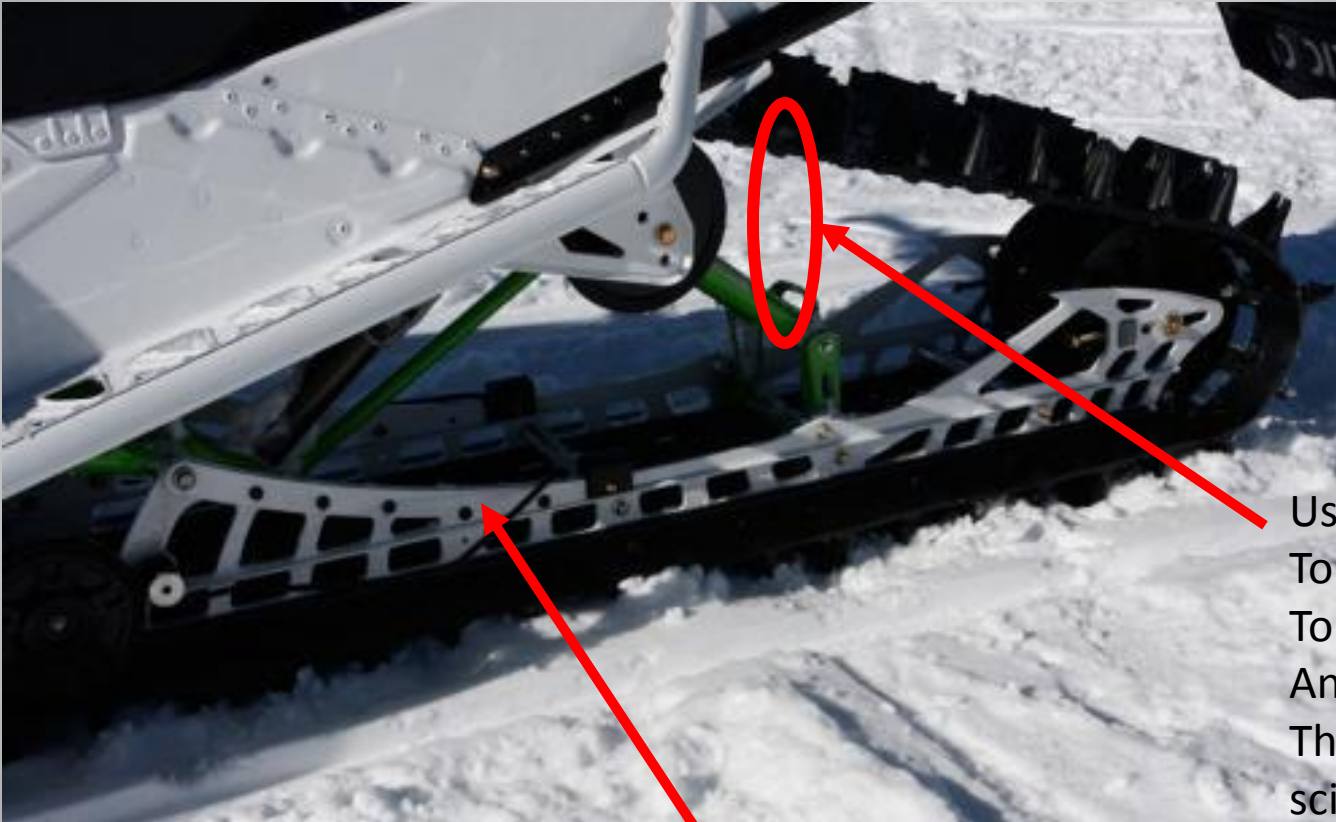


Use Ratchet Strap  
To Hold the Rear  
Torque Arm Up  
And then remove  
The stock rear  
scissor

Unload Torsion Spring  
If equipped


# Drill New Hole

Remove the stock limiter

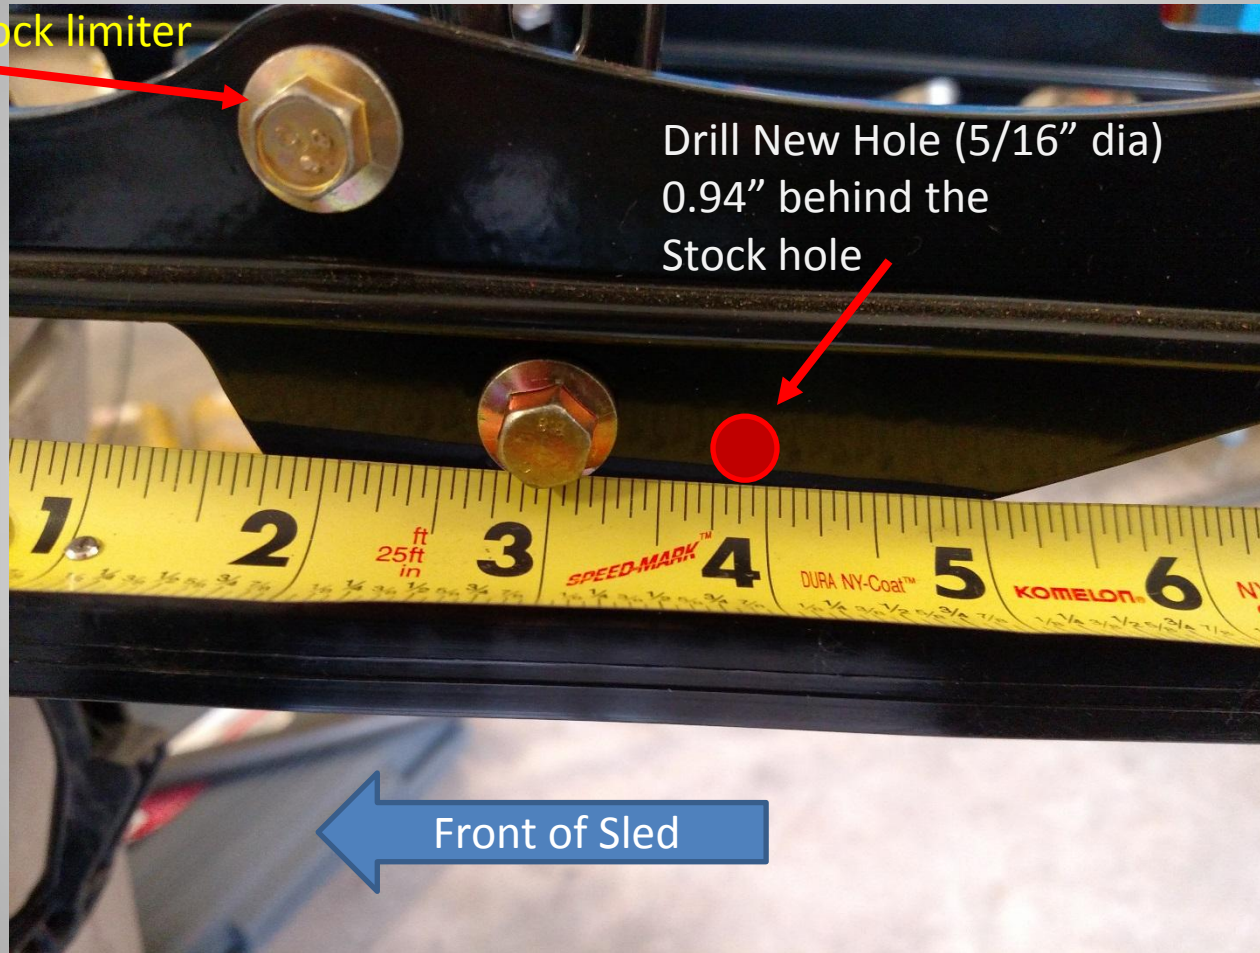

There are no longer nuts  
On the top of the mount.  
They are just bolts that  
Get inserted from the top

# Install HELO

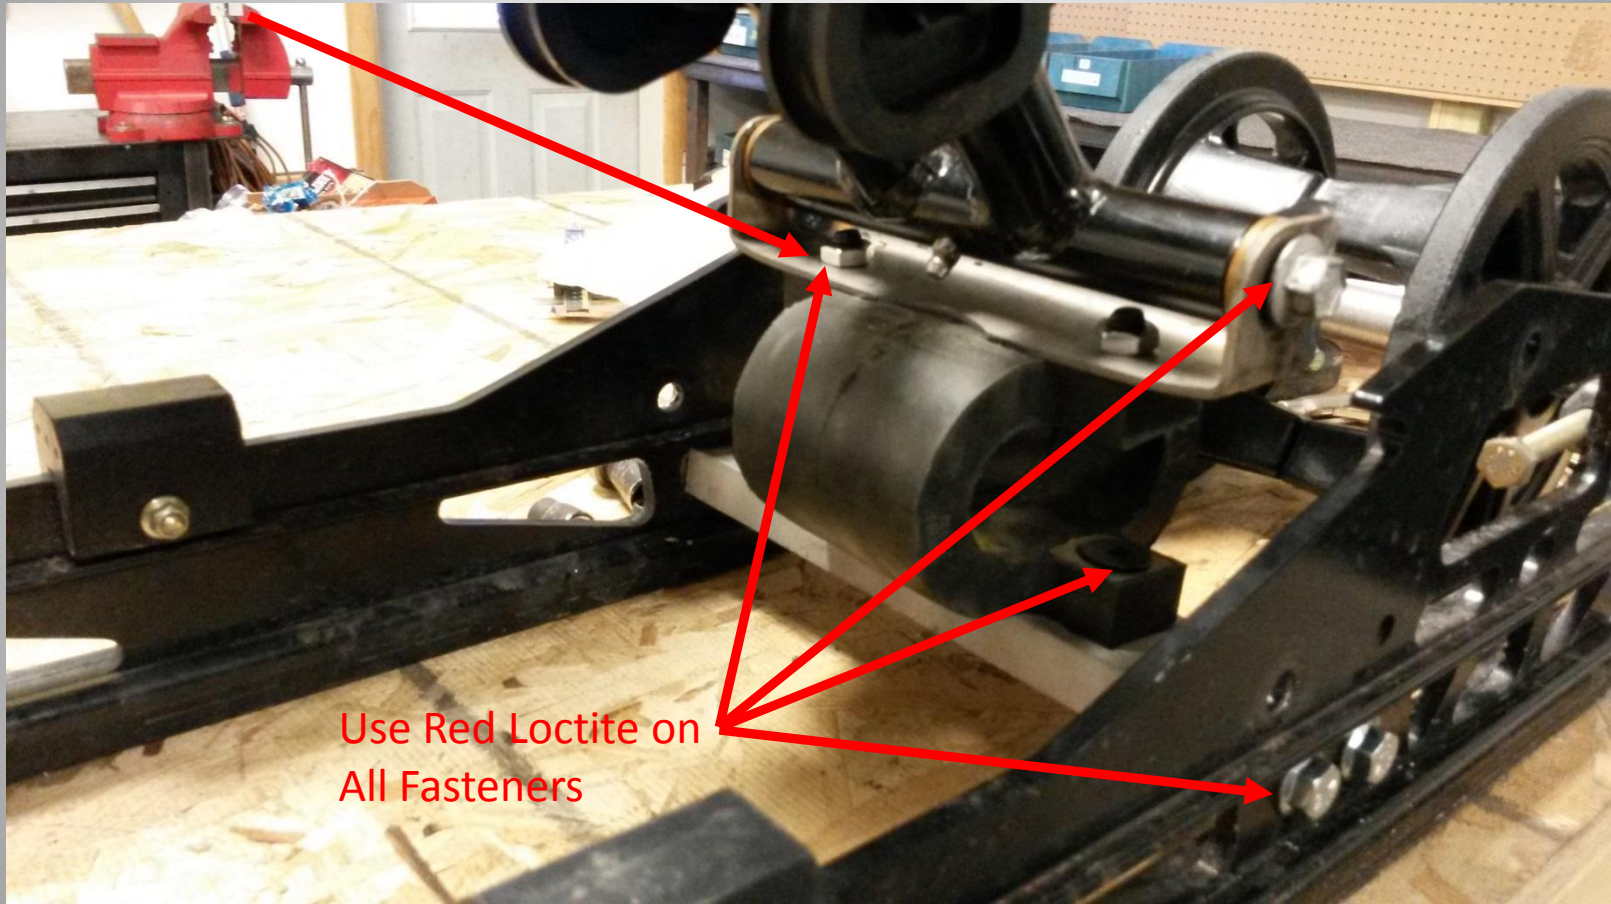

**EZ·RYDE™**

47140 N. Main Street  
Houghton MI 49931  
906.482.7530  
[www.EZRyde.com](http://www.EZRyde.com)

# Install HELO

