



'12-'17 MXZ TNT/X/RS/XRS
R-Motion

Mounting Instructions


Please note that GLSV assumes no responsibility for damage that may occur during installation. Snowmobiling presents inherent dangers. GLSV assumes no responsibility for damage, injuries, or casualties that result from the use of this product. By installing the product the purchaser agrees to release GLSV from any and all liabilities. GLSV will provide a full refund if purchaser does not agree to the above terms.



47140 N. Main Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

Stock


Replace Stock Rear
Scissor Link

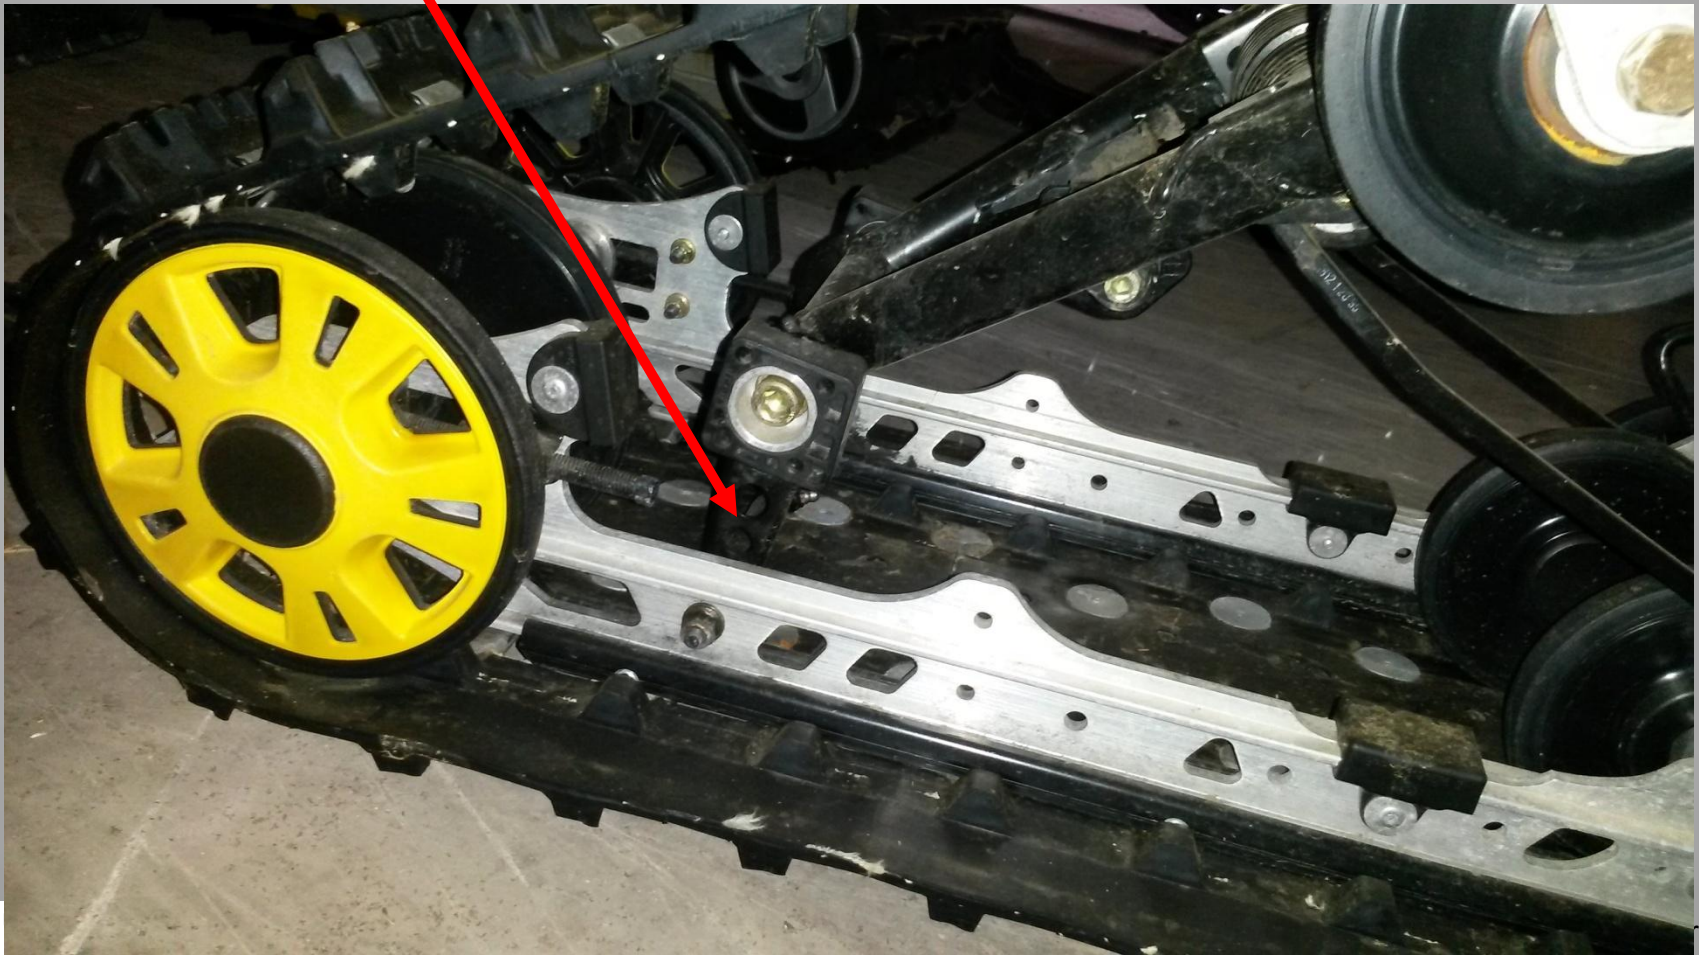

Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

Stock


Unload Torsion Spring

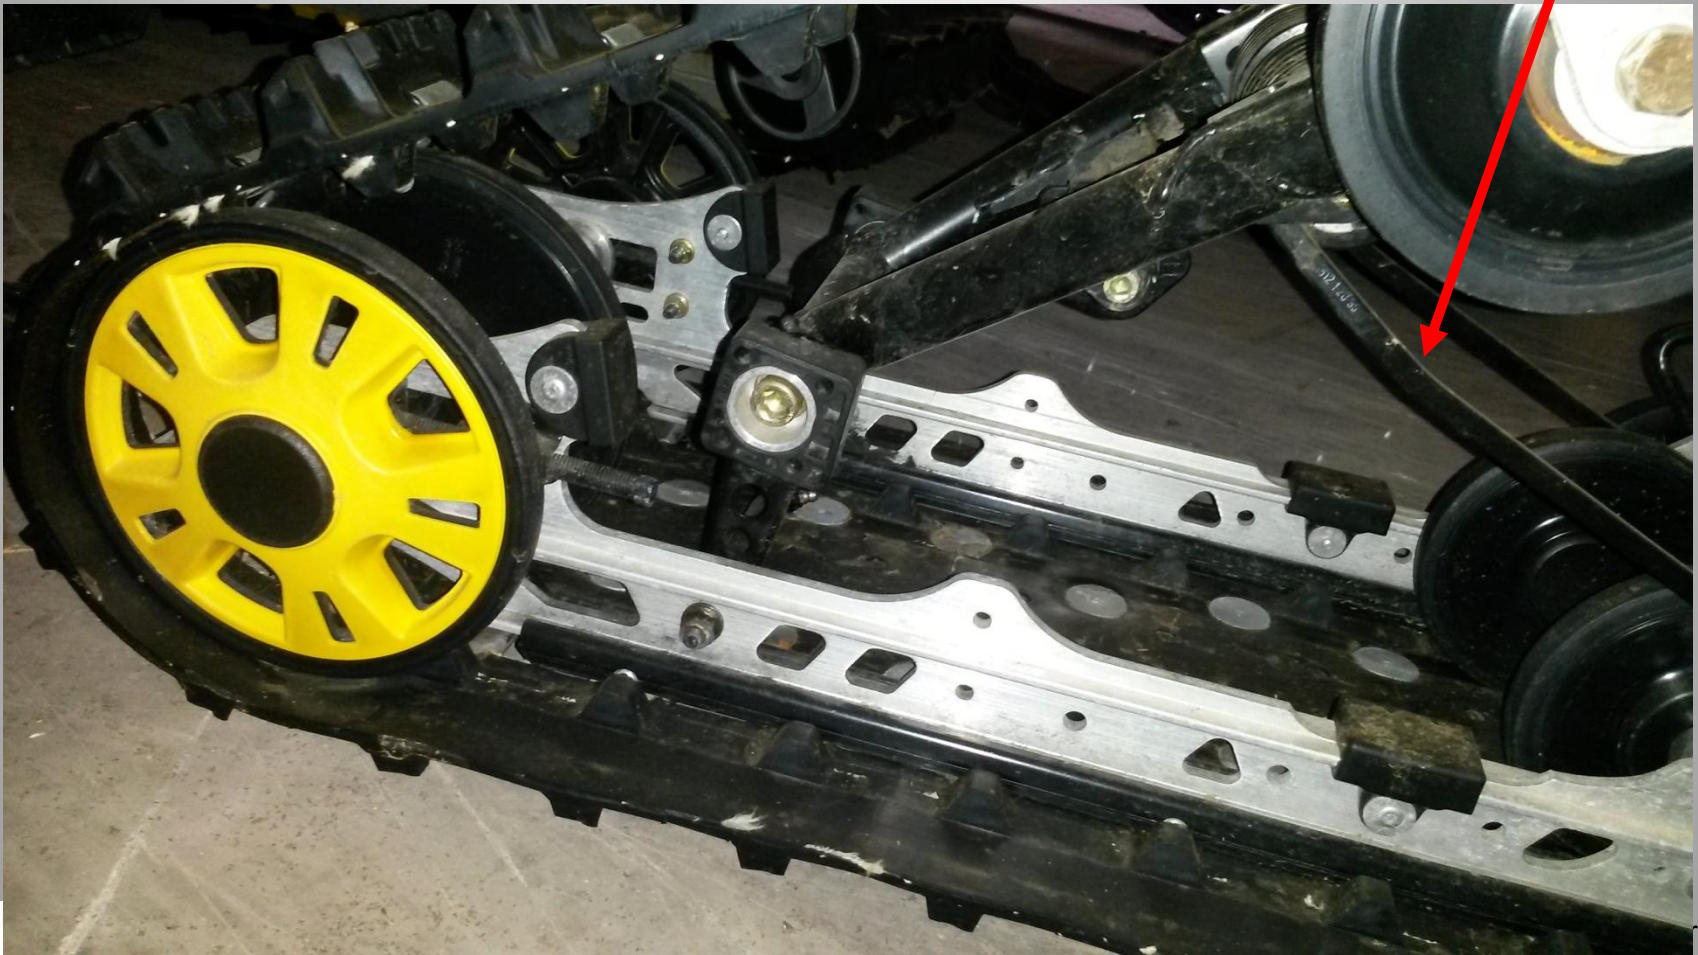

Remove Coupling Blocks


Remove the stock
Coupling Blocks

Re-use the stock bolts

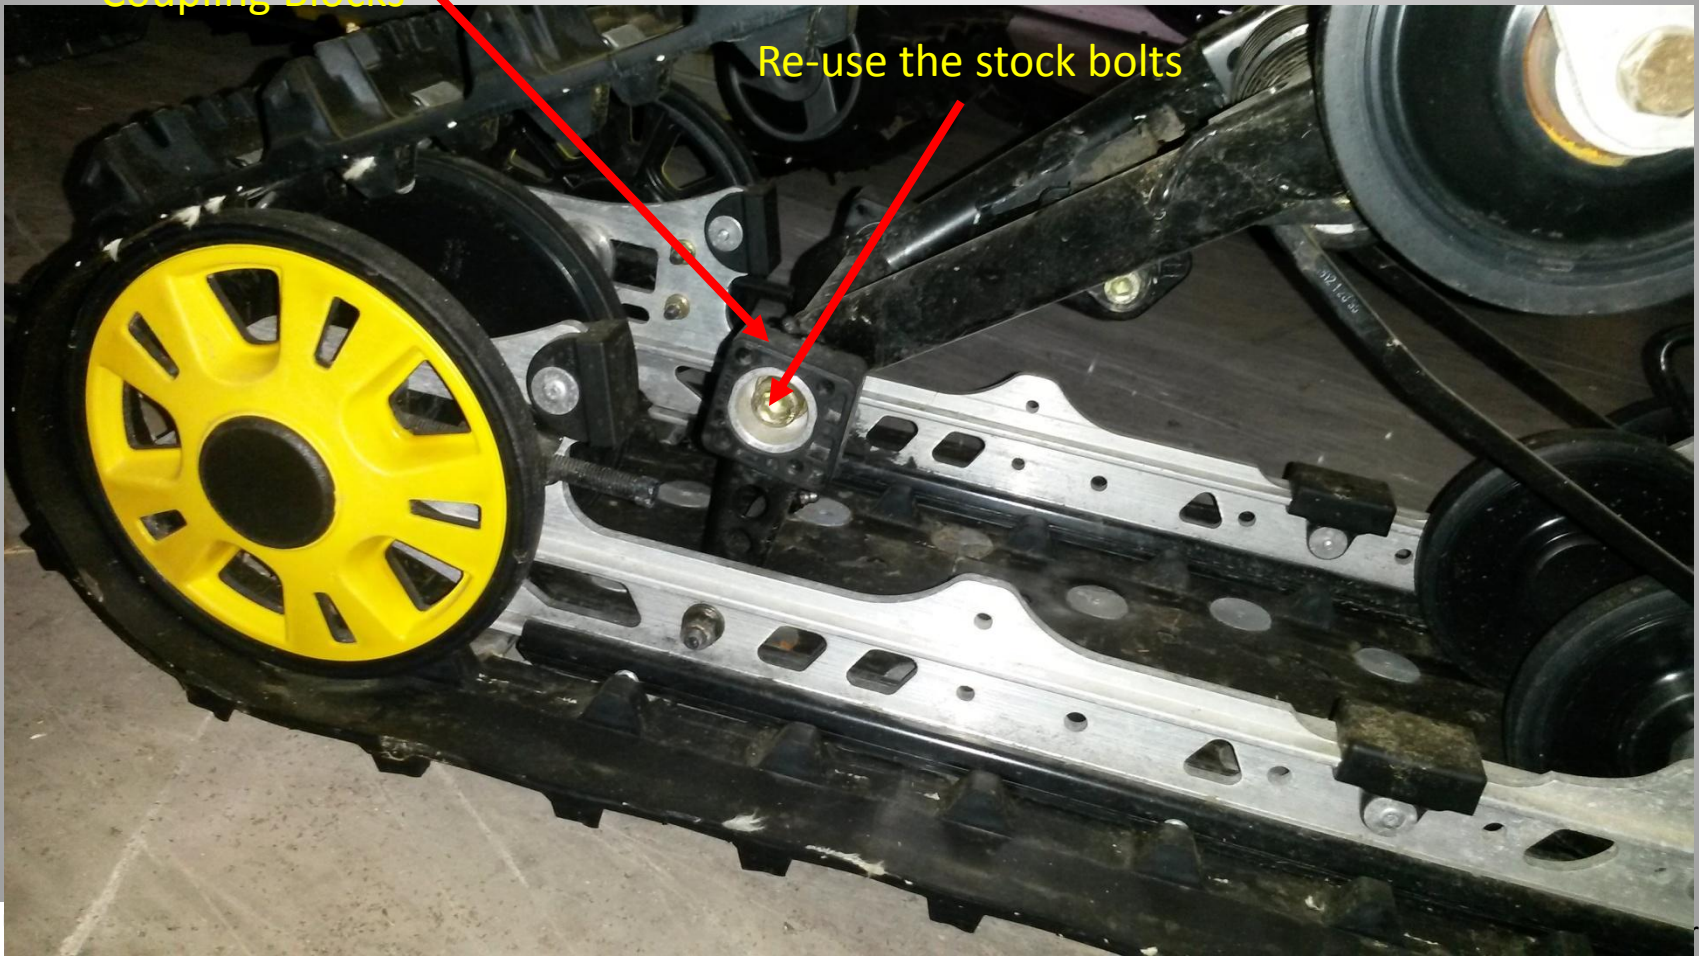

Trim Stock Arms


Trim both links at this angle

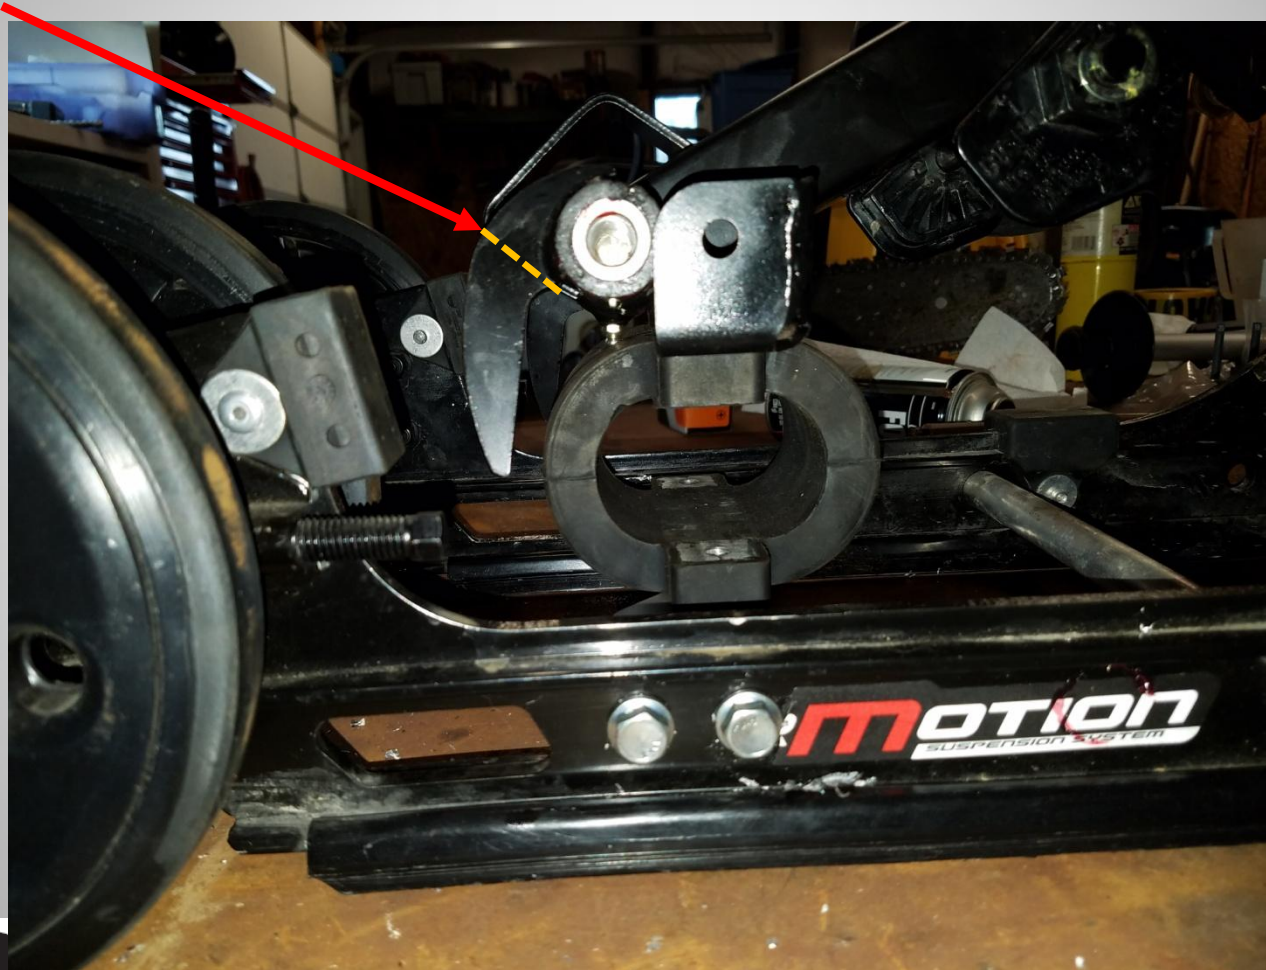

EZ·RYDE
EZ·RYDE


7140 N. Main Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

Drill New Holes

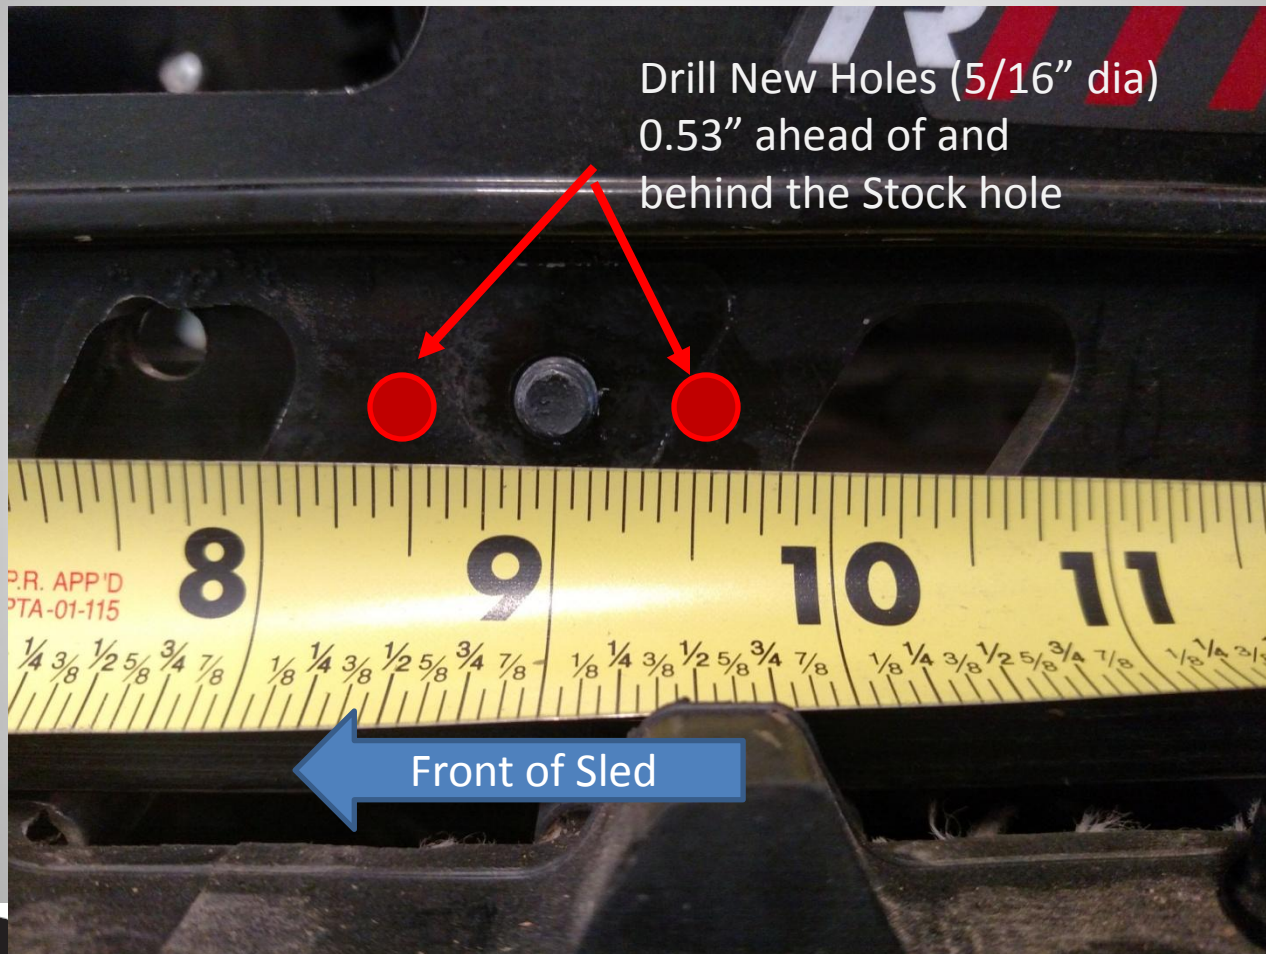

The HELO is shown here in the Backwards orientation. Holes Will line up when the mount And brackets are rotated 180 Deg.

Install HELO

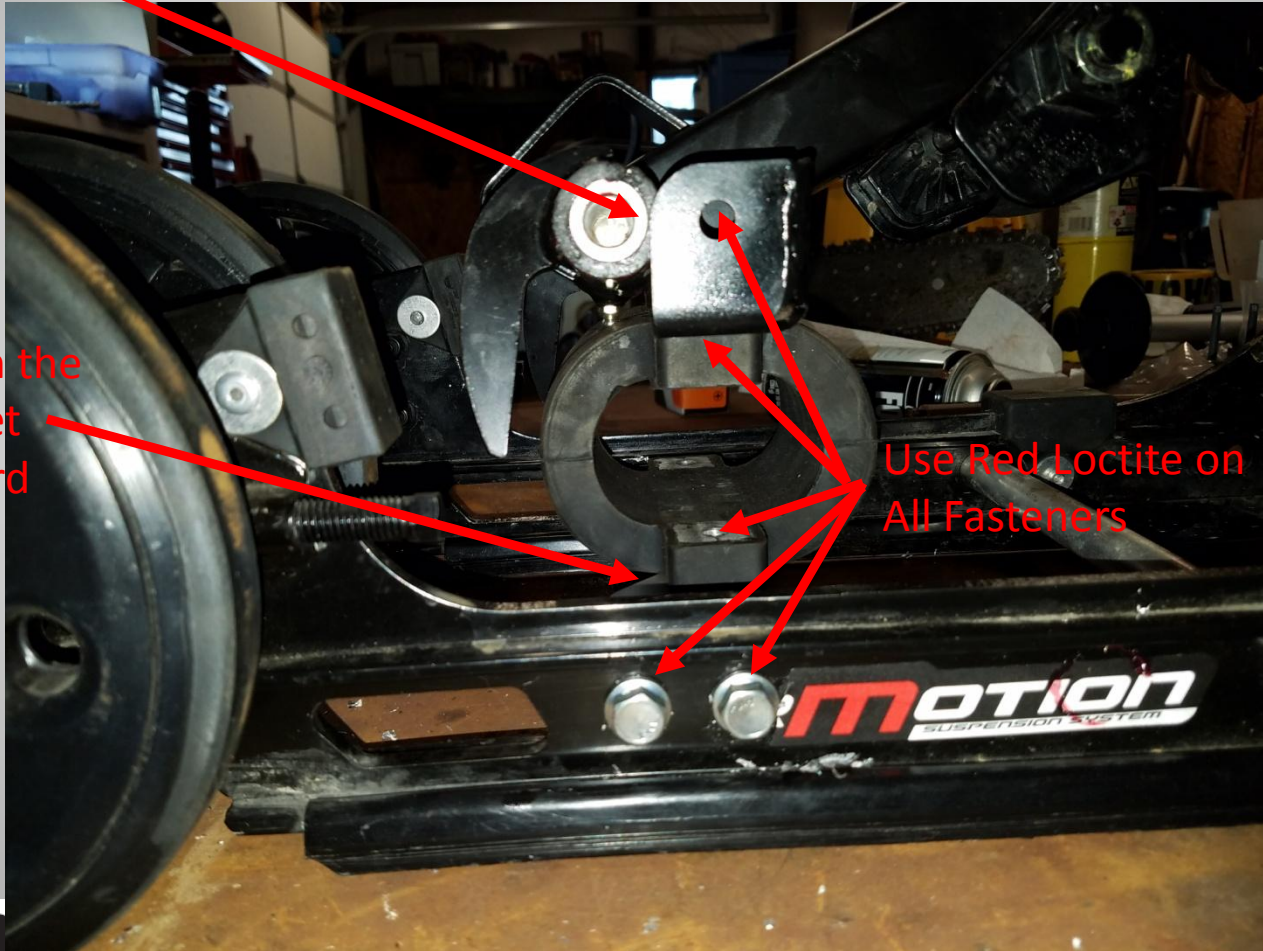


The arrow on the Lower bracket Points forward

Use Red Loctite on All Fasteners

Install HELO

Torque 3/8" fasteners
To 20 ft-lbs.

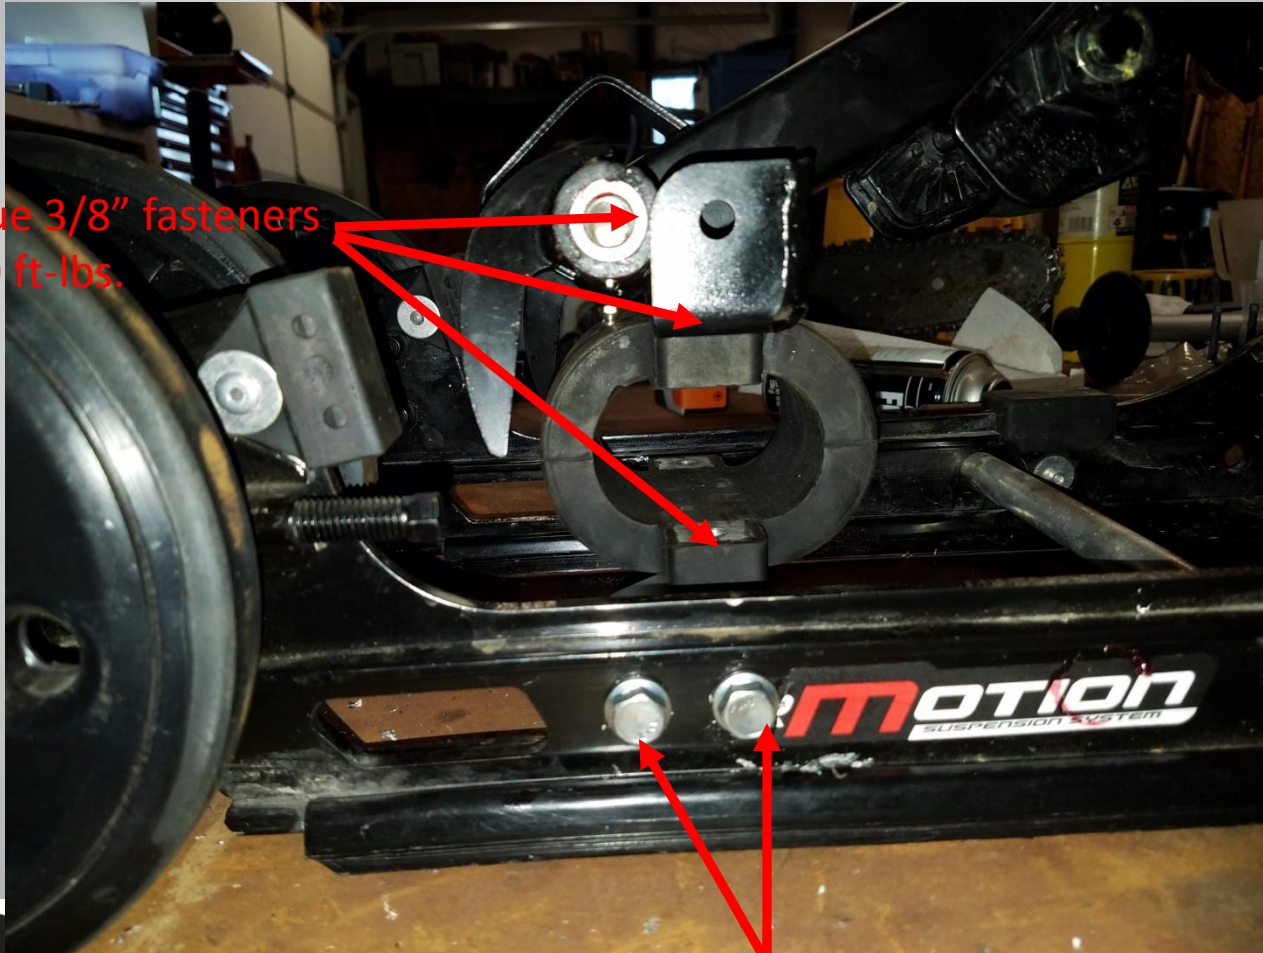

Torque 5/16" fasteners
To 13 ft-lbs.

7140 N. Main Street
Houghton MI 49931
906.482.7530
www.EZRyde.com

EZ·RYDE
EZ·RYDE